


* 4mm, front panel fixing holes, drilled after assembly

A-A

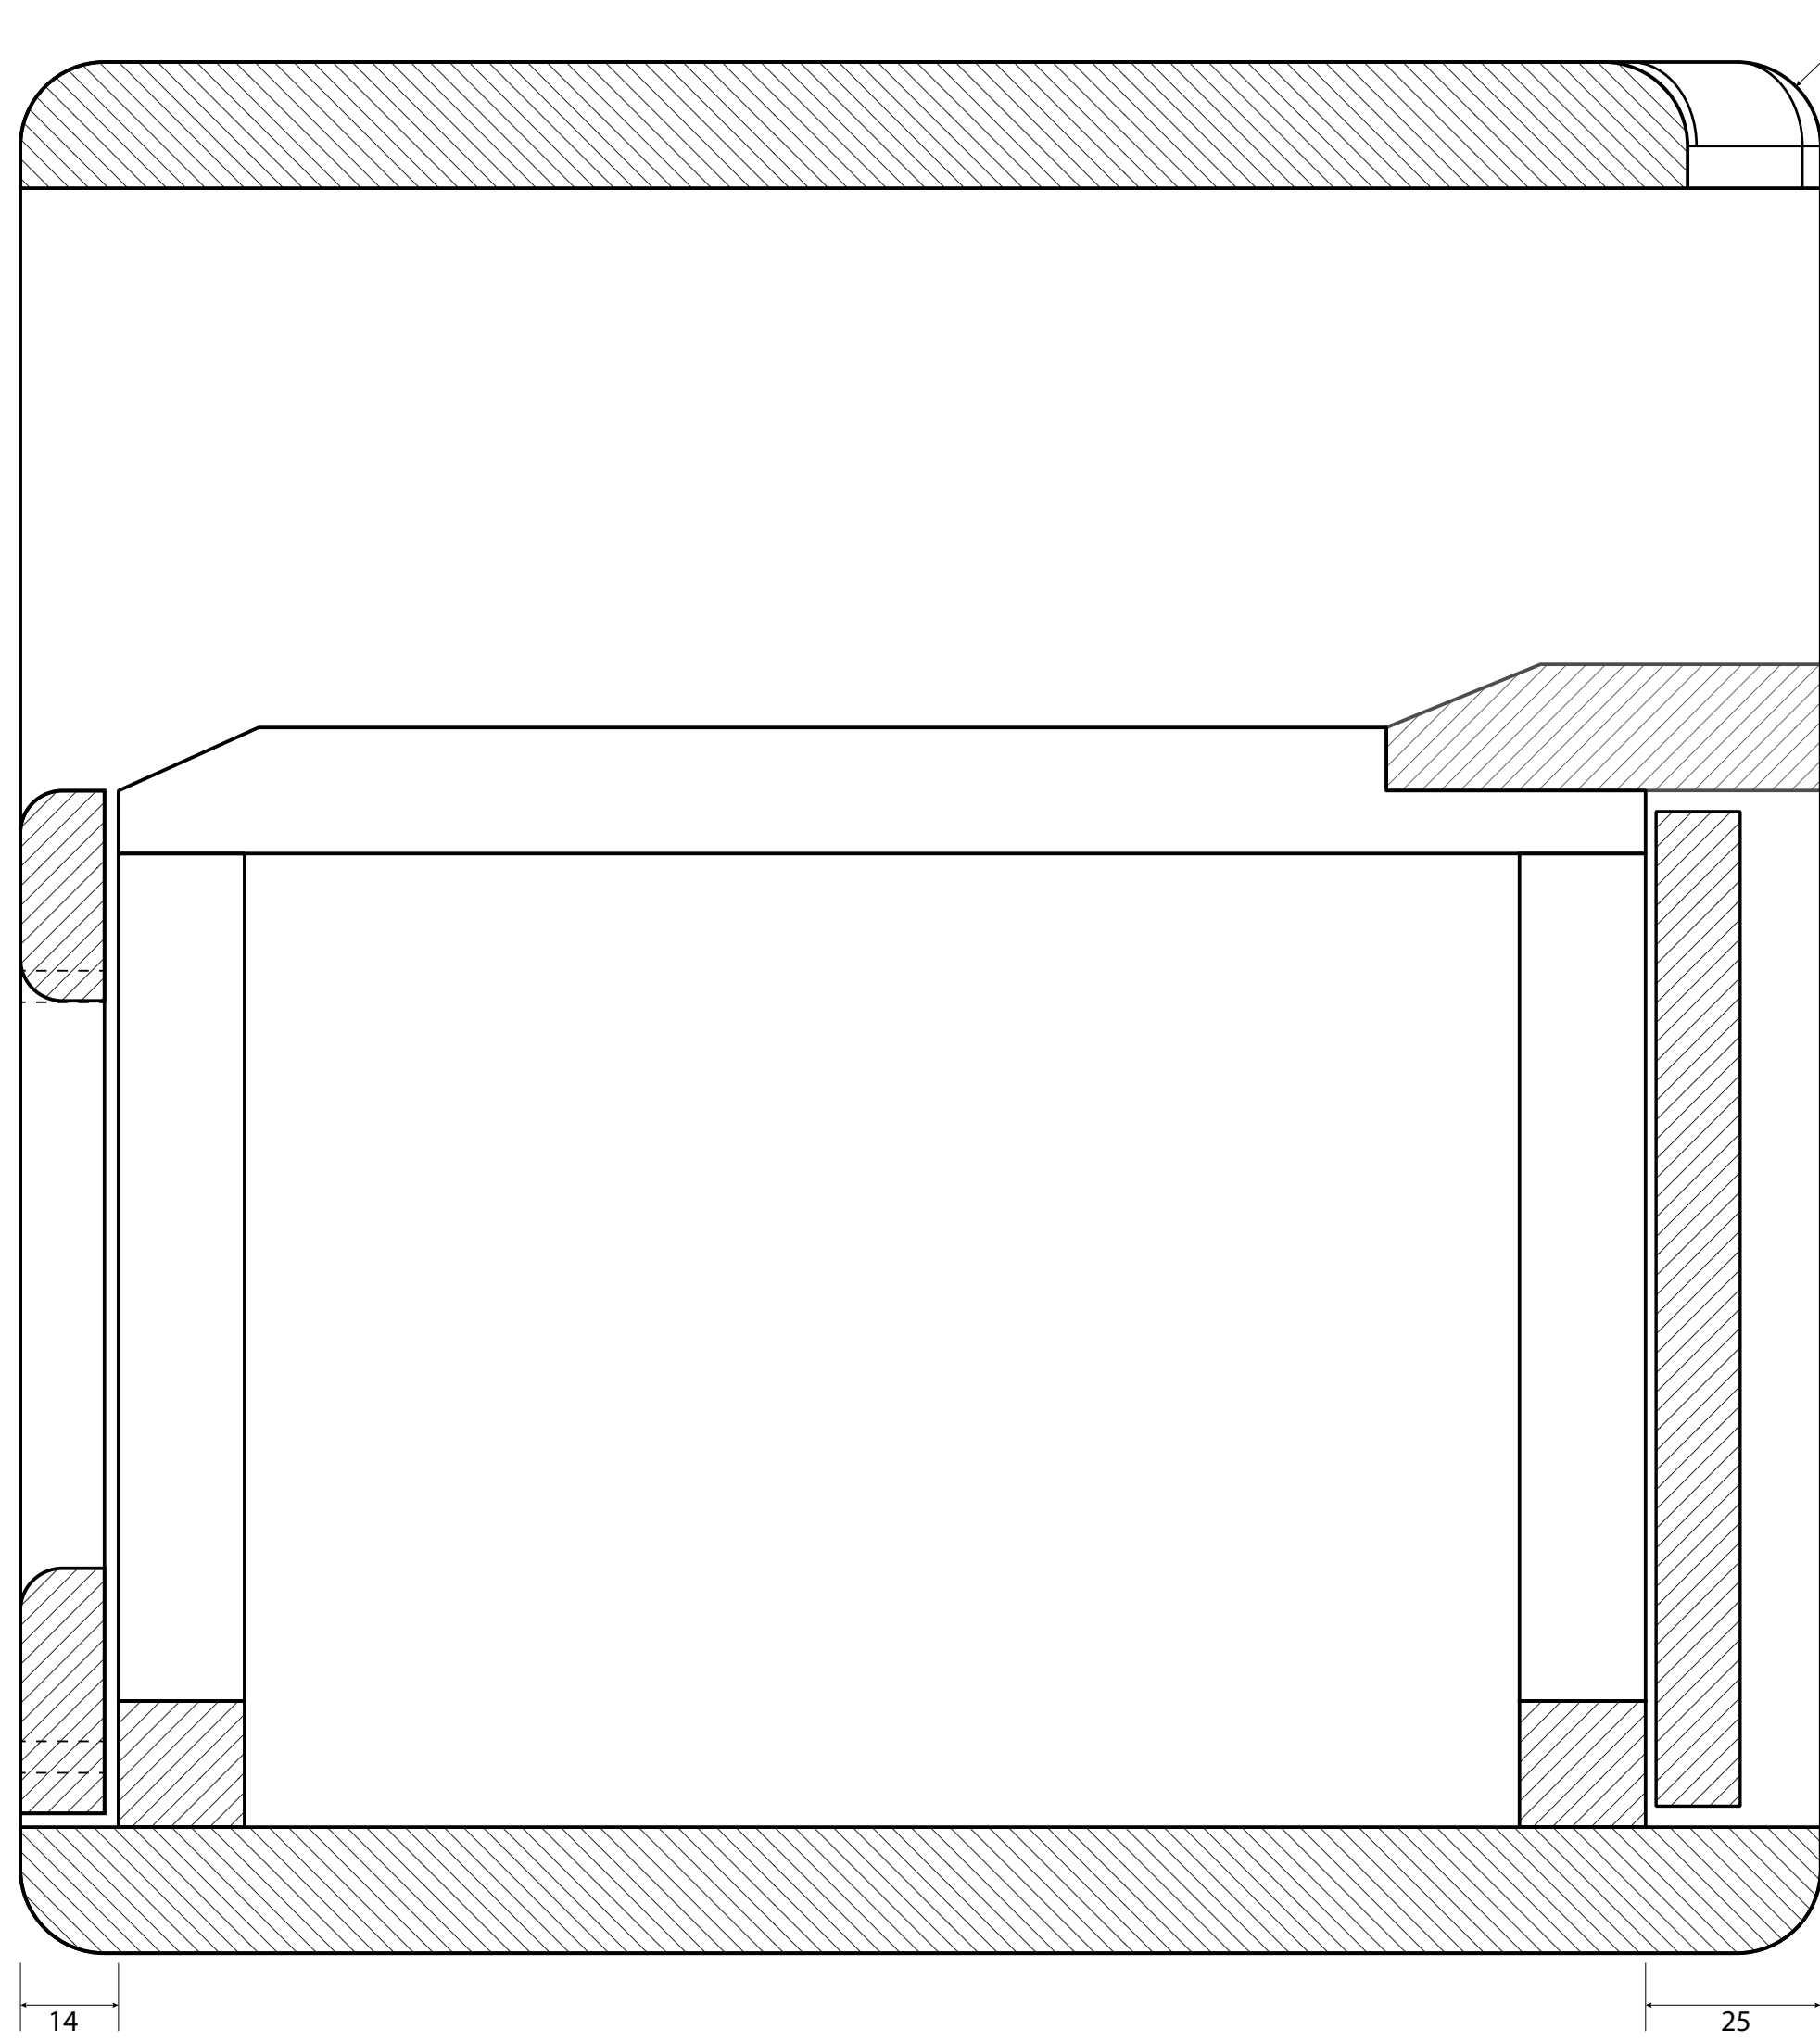

12.7 mm radius, roundover router bit, used on outer edges only.


Tube Town BOM
CHASSIS: Tube Town Chassis 008, *"Dumble Basic" - 490mm x 200 mm x 65mm
*"Dumble Standard" has the same dimensions.
GRILL CLOTH, 1.5mm thick
TOLEX, 1mm thick
Piping Medium White 3.1 x 8.5 mm (ke-t03wh-4)
x2, Fender Cabinet corner 2 legs, 4 pcs (fe099-1348)
x4, Rubber foot with steel insert 38 x 15 mm (ah4907)
x4, Cup Washer M6, nickel plated (scr185)
x4, Countersunk raised head screw M6 x 30 mm, DIN 966 / ISO 7047 (scr-7047-6-30)
x4, Cagenut (wide slot), M6 (ah5652)




ODS HEAD - Metric
Modelled after the ODS, s/n: 201

18mm pine board (200cm x 40cm) used extensively,
except for front and back panels (12mm birch plywood)


Drawing by: Stephen Begley
Date: 01/04/2023

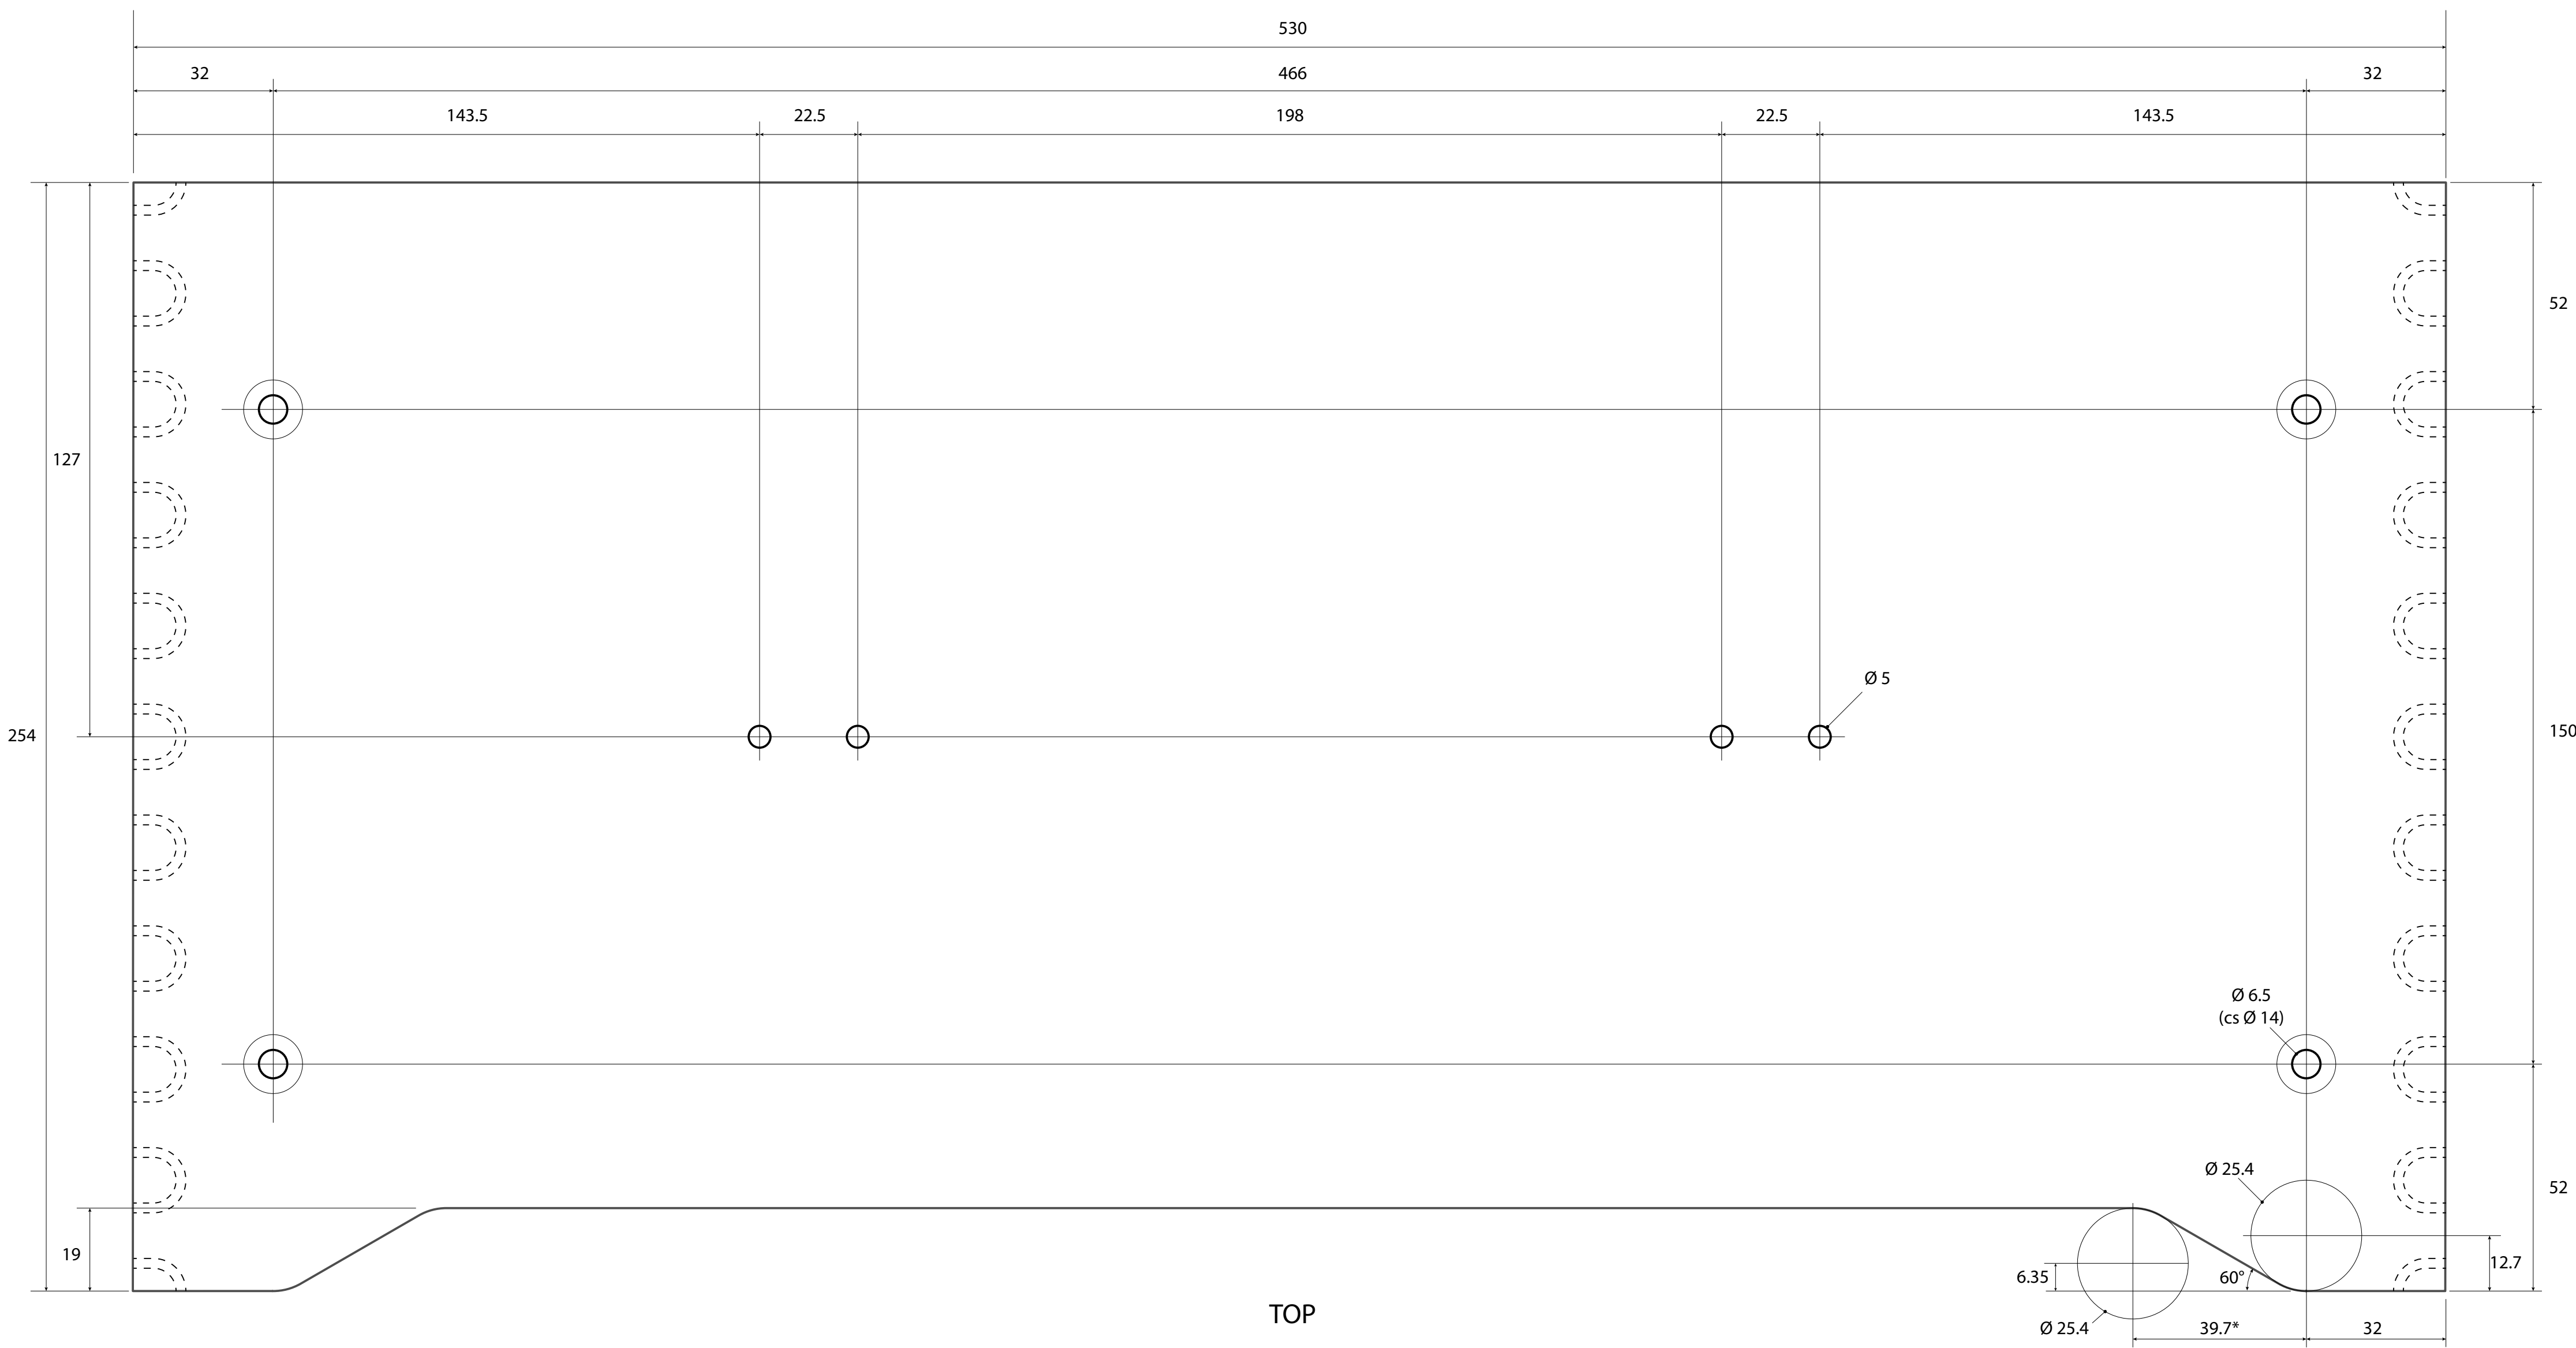


* Measured from the 60° tangent of the circle 32mm in from the edge.

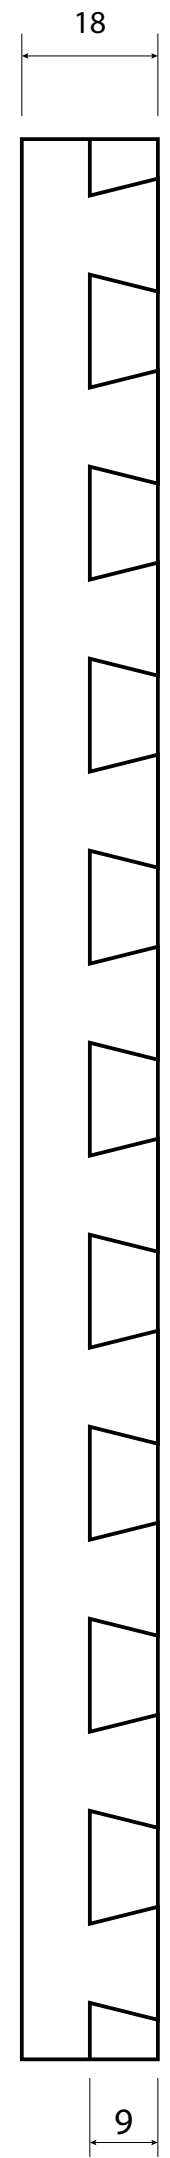

SIDE, RIGHT

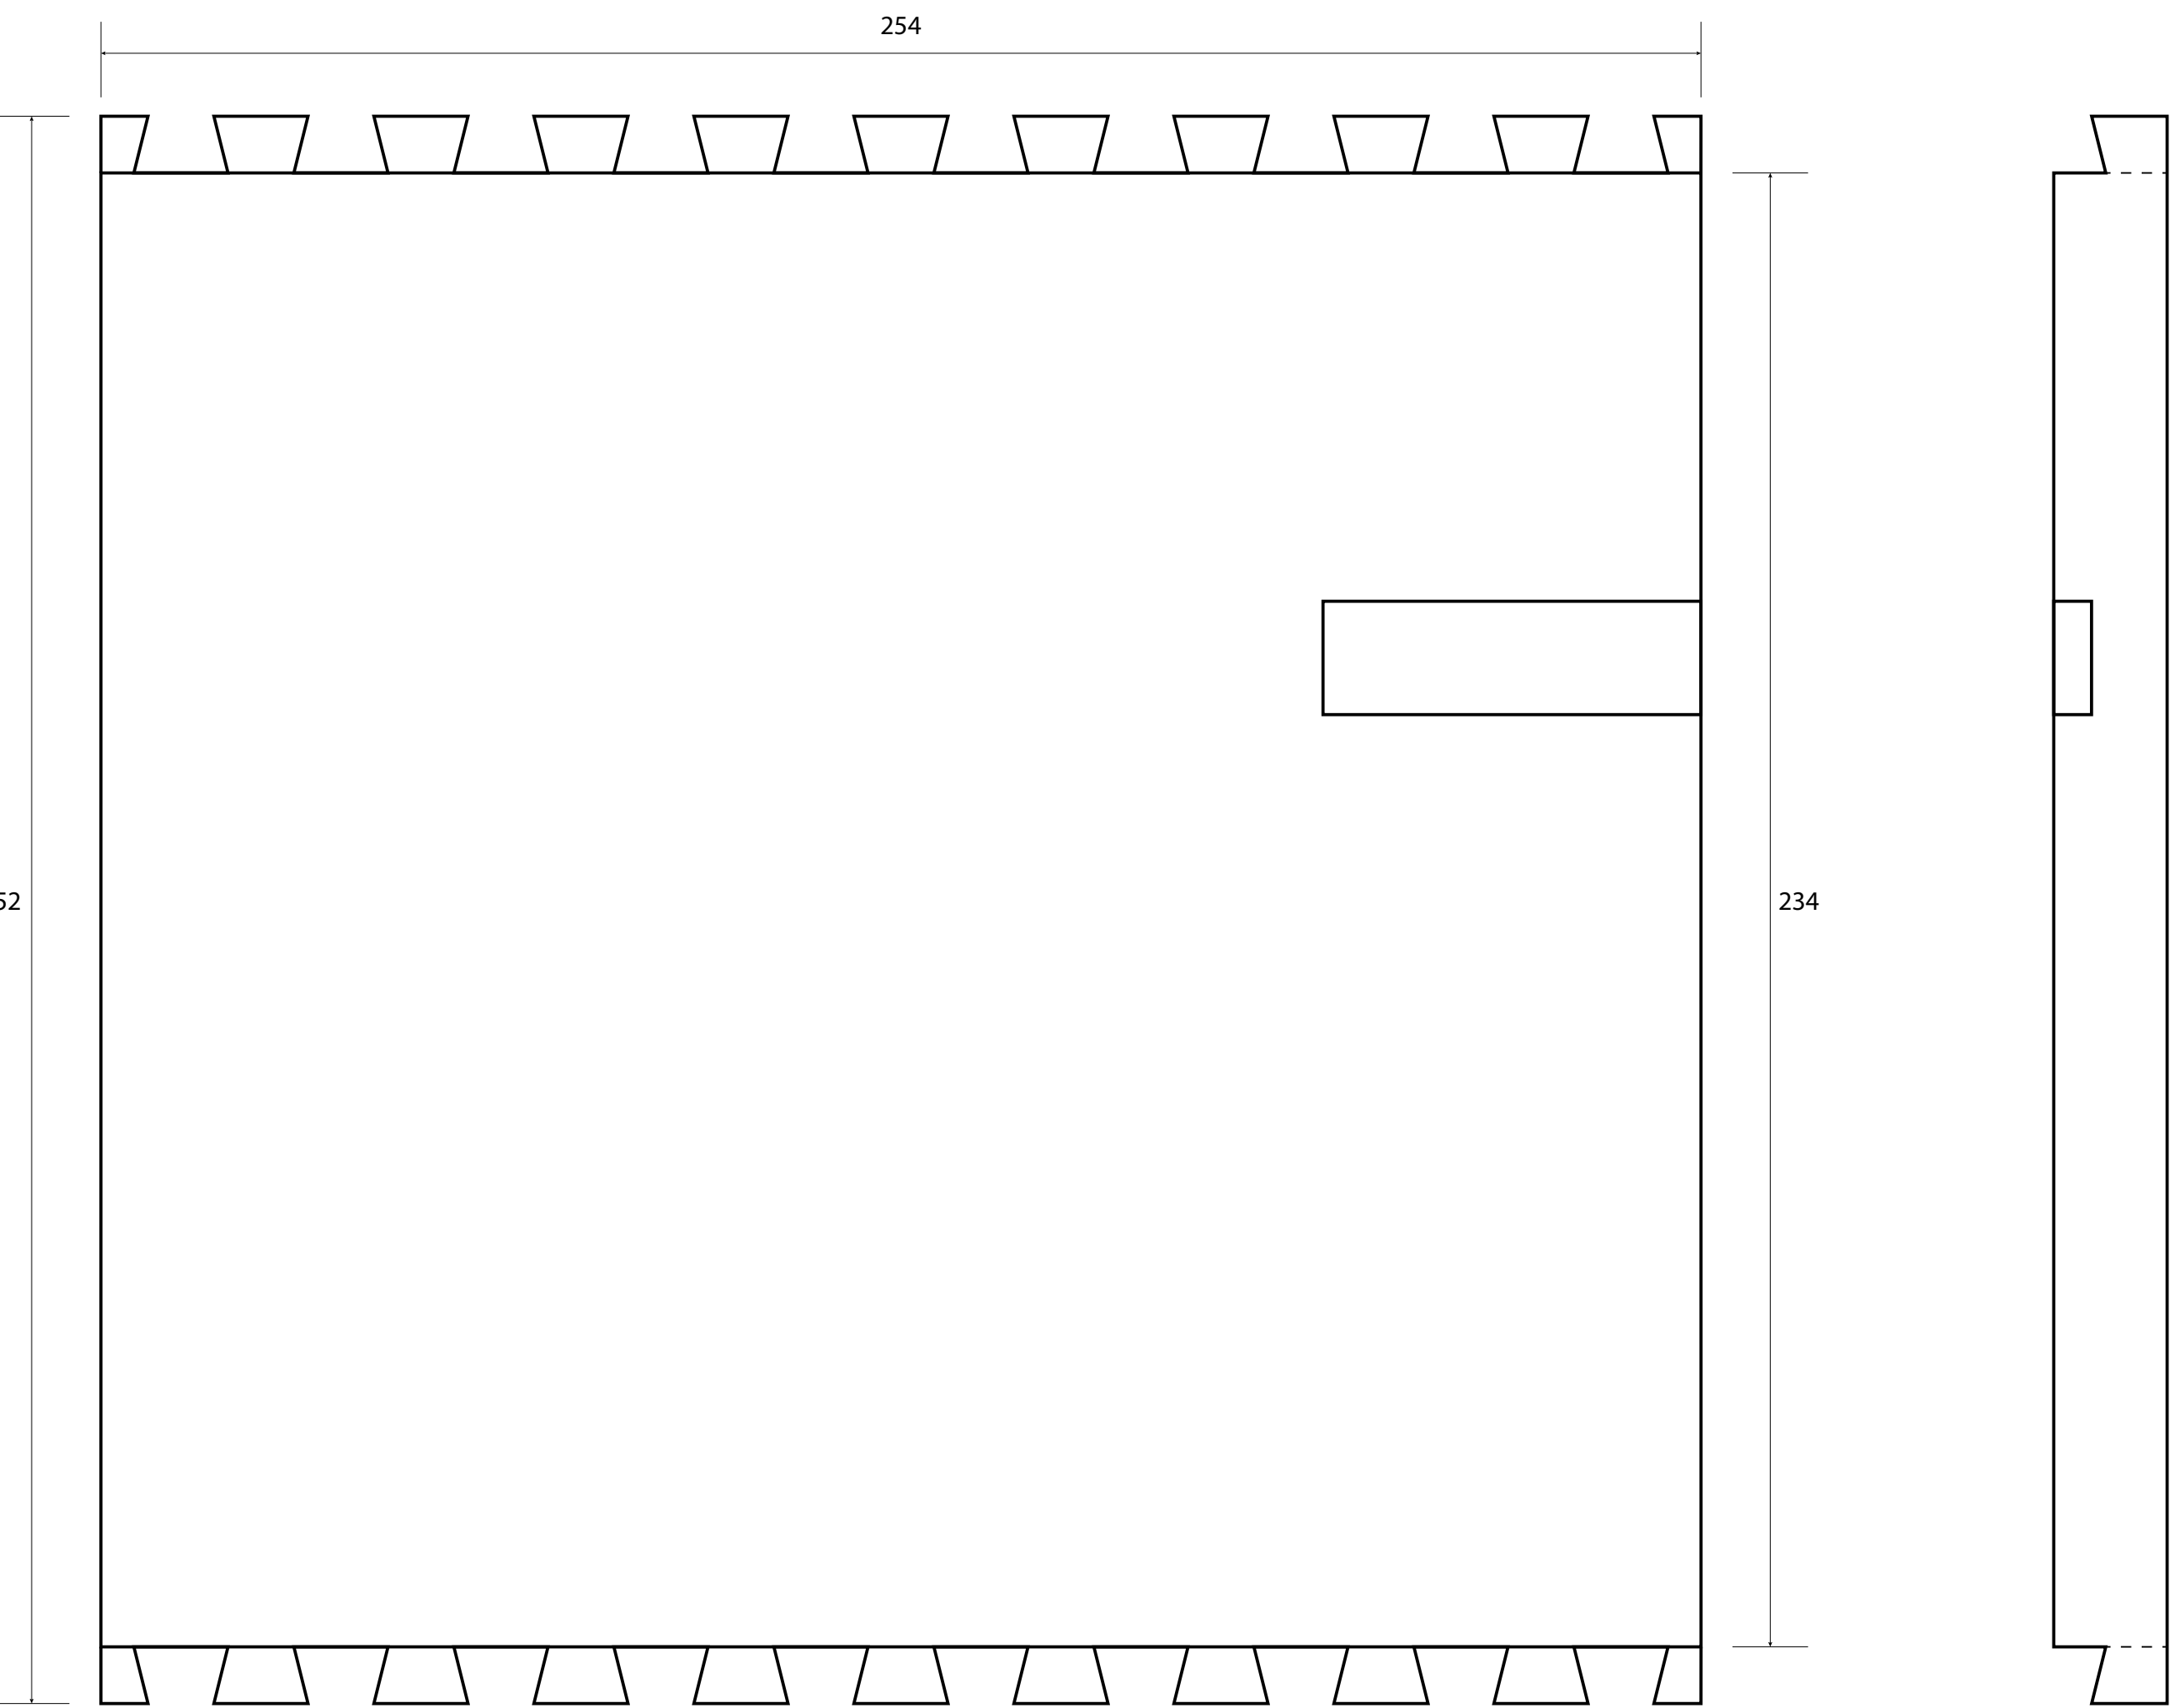

SIDE, LEFT

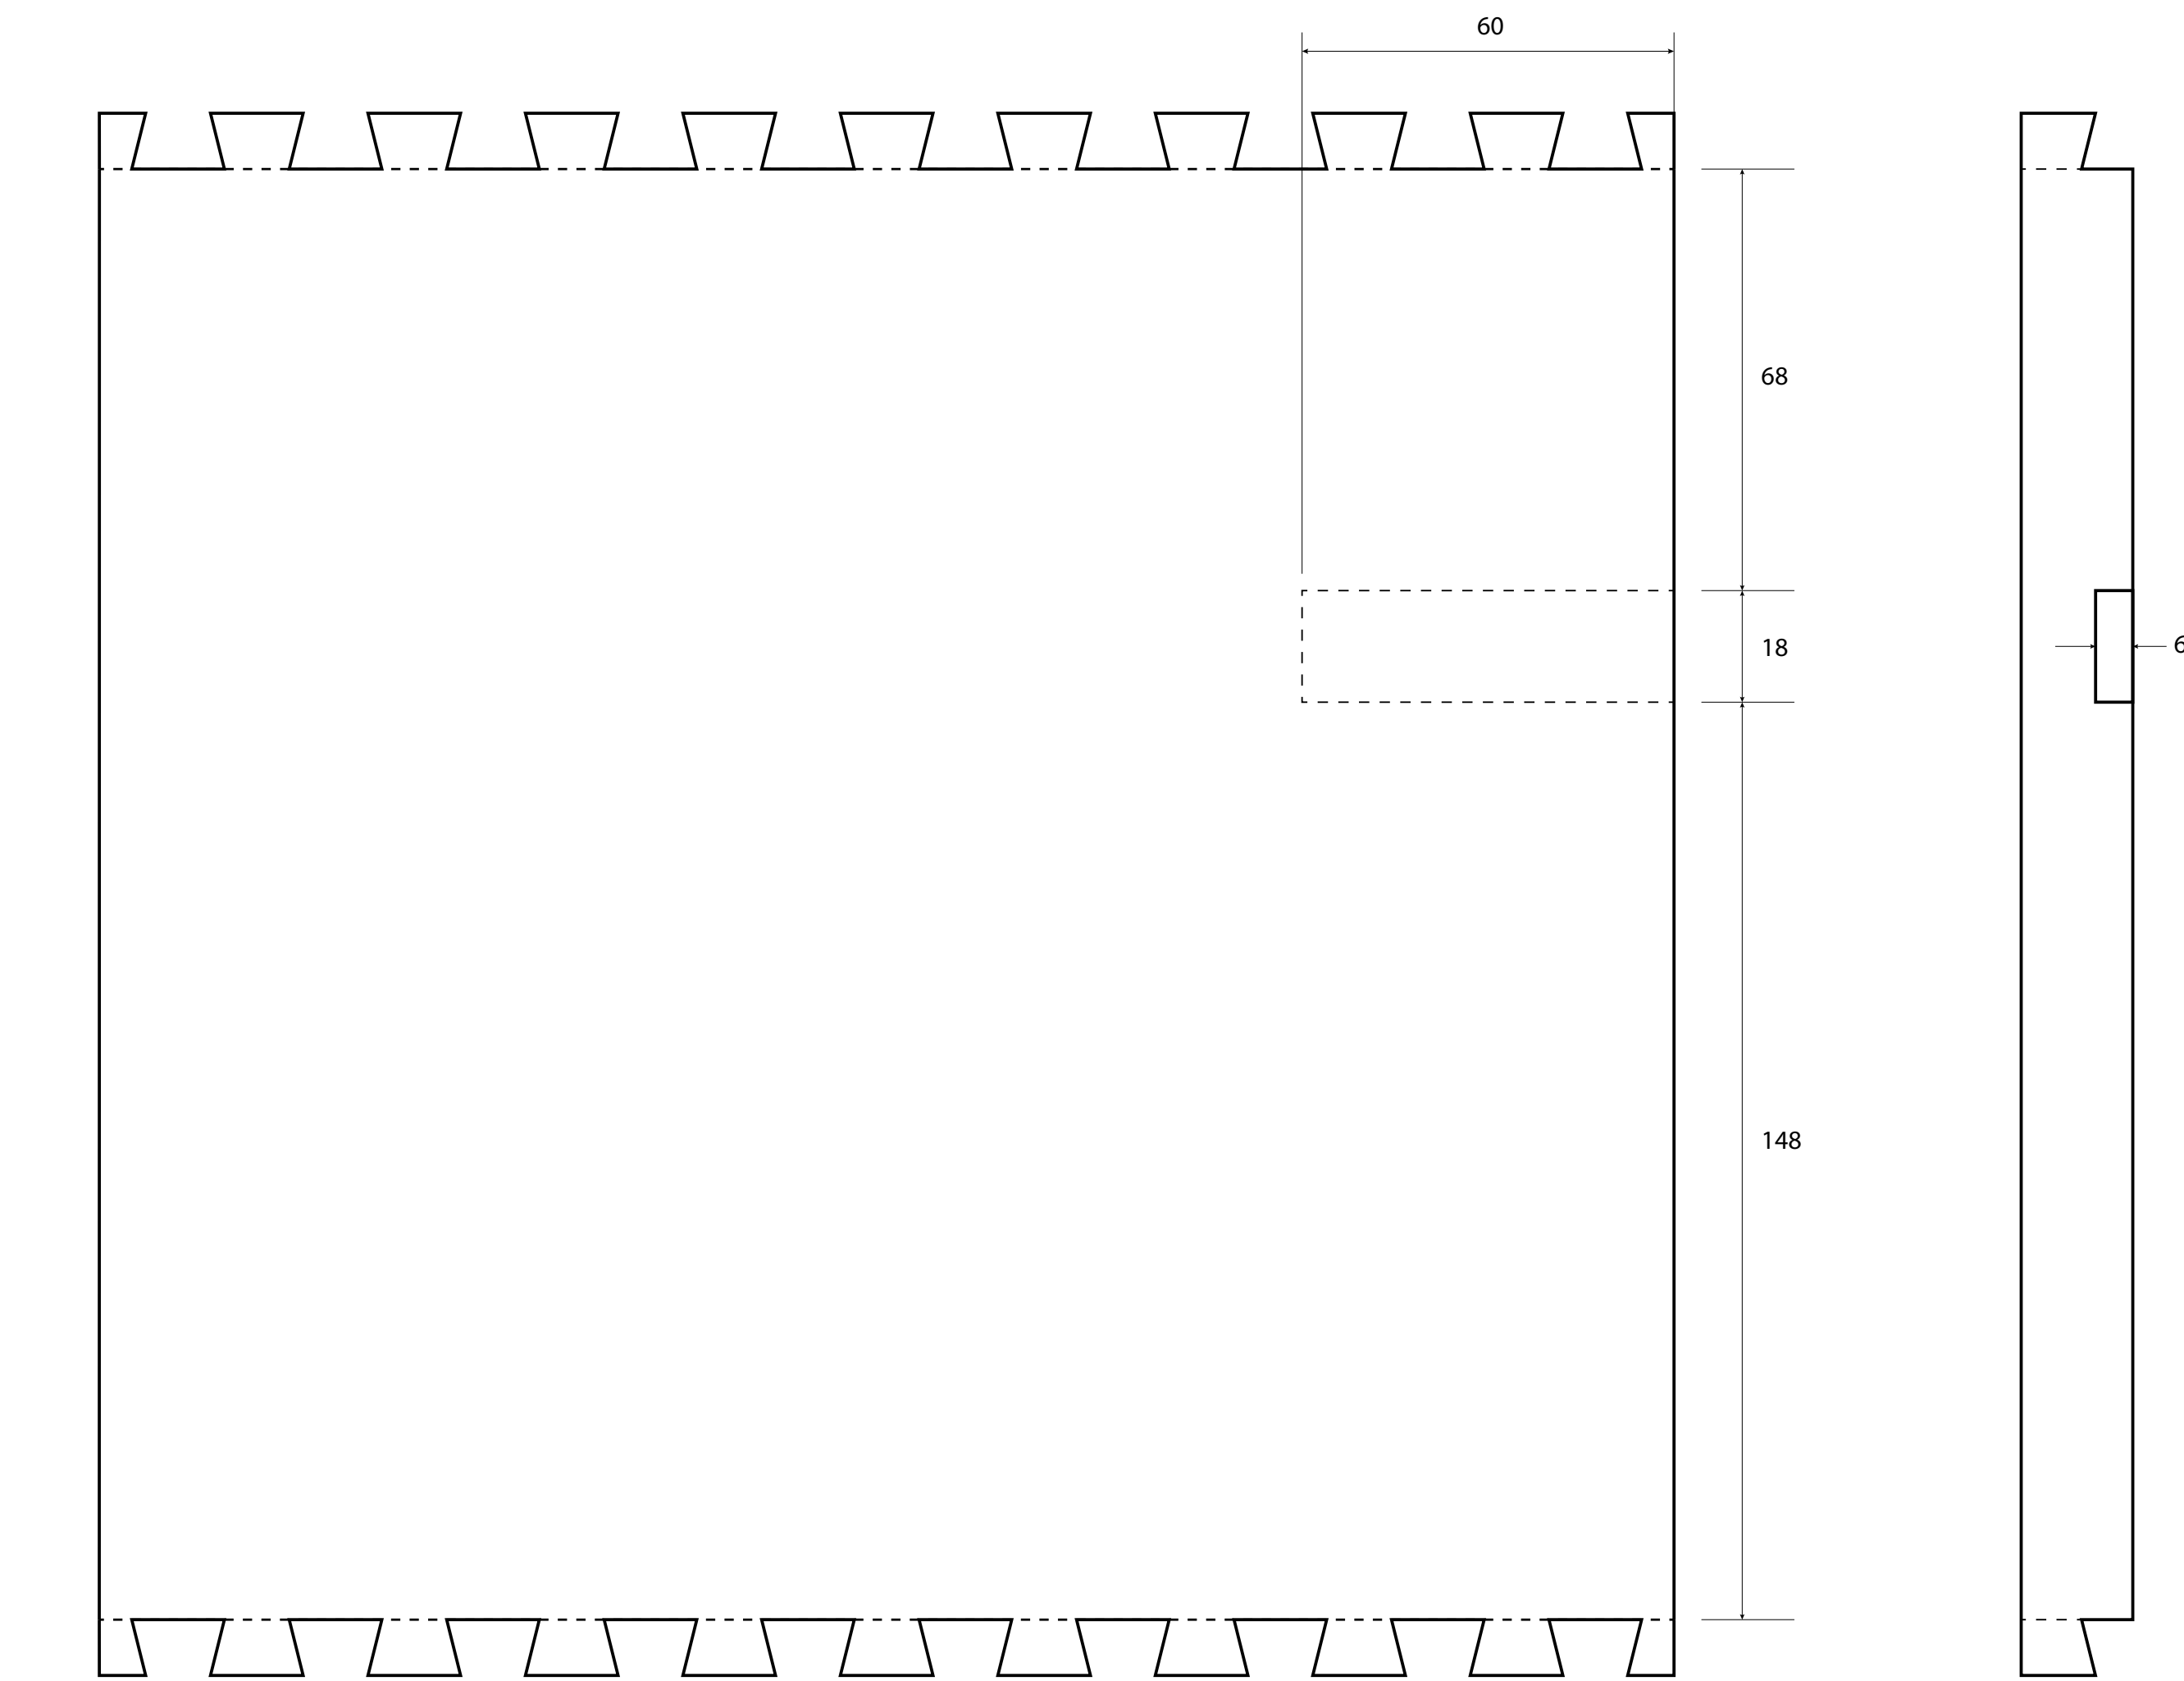


SIDE, LEFT


* Triangular fillets may be added in the rebates after the crossbar is fitted.



BOTTOM

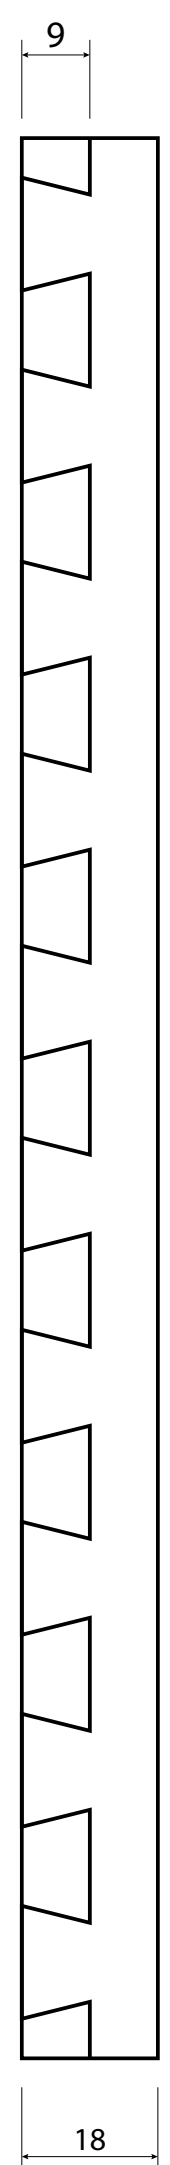

SIDE, LEFT

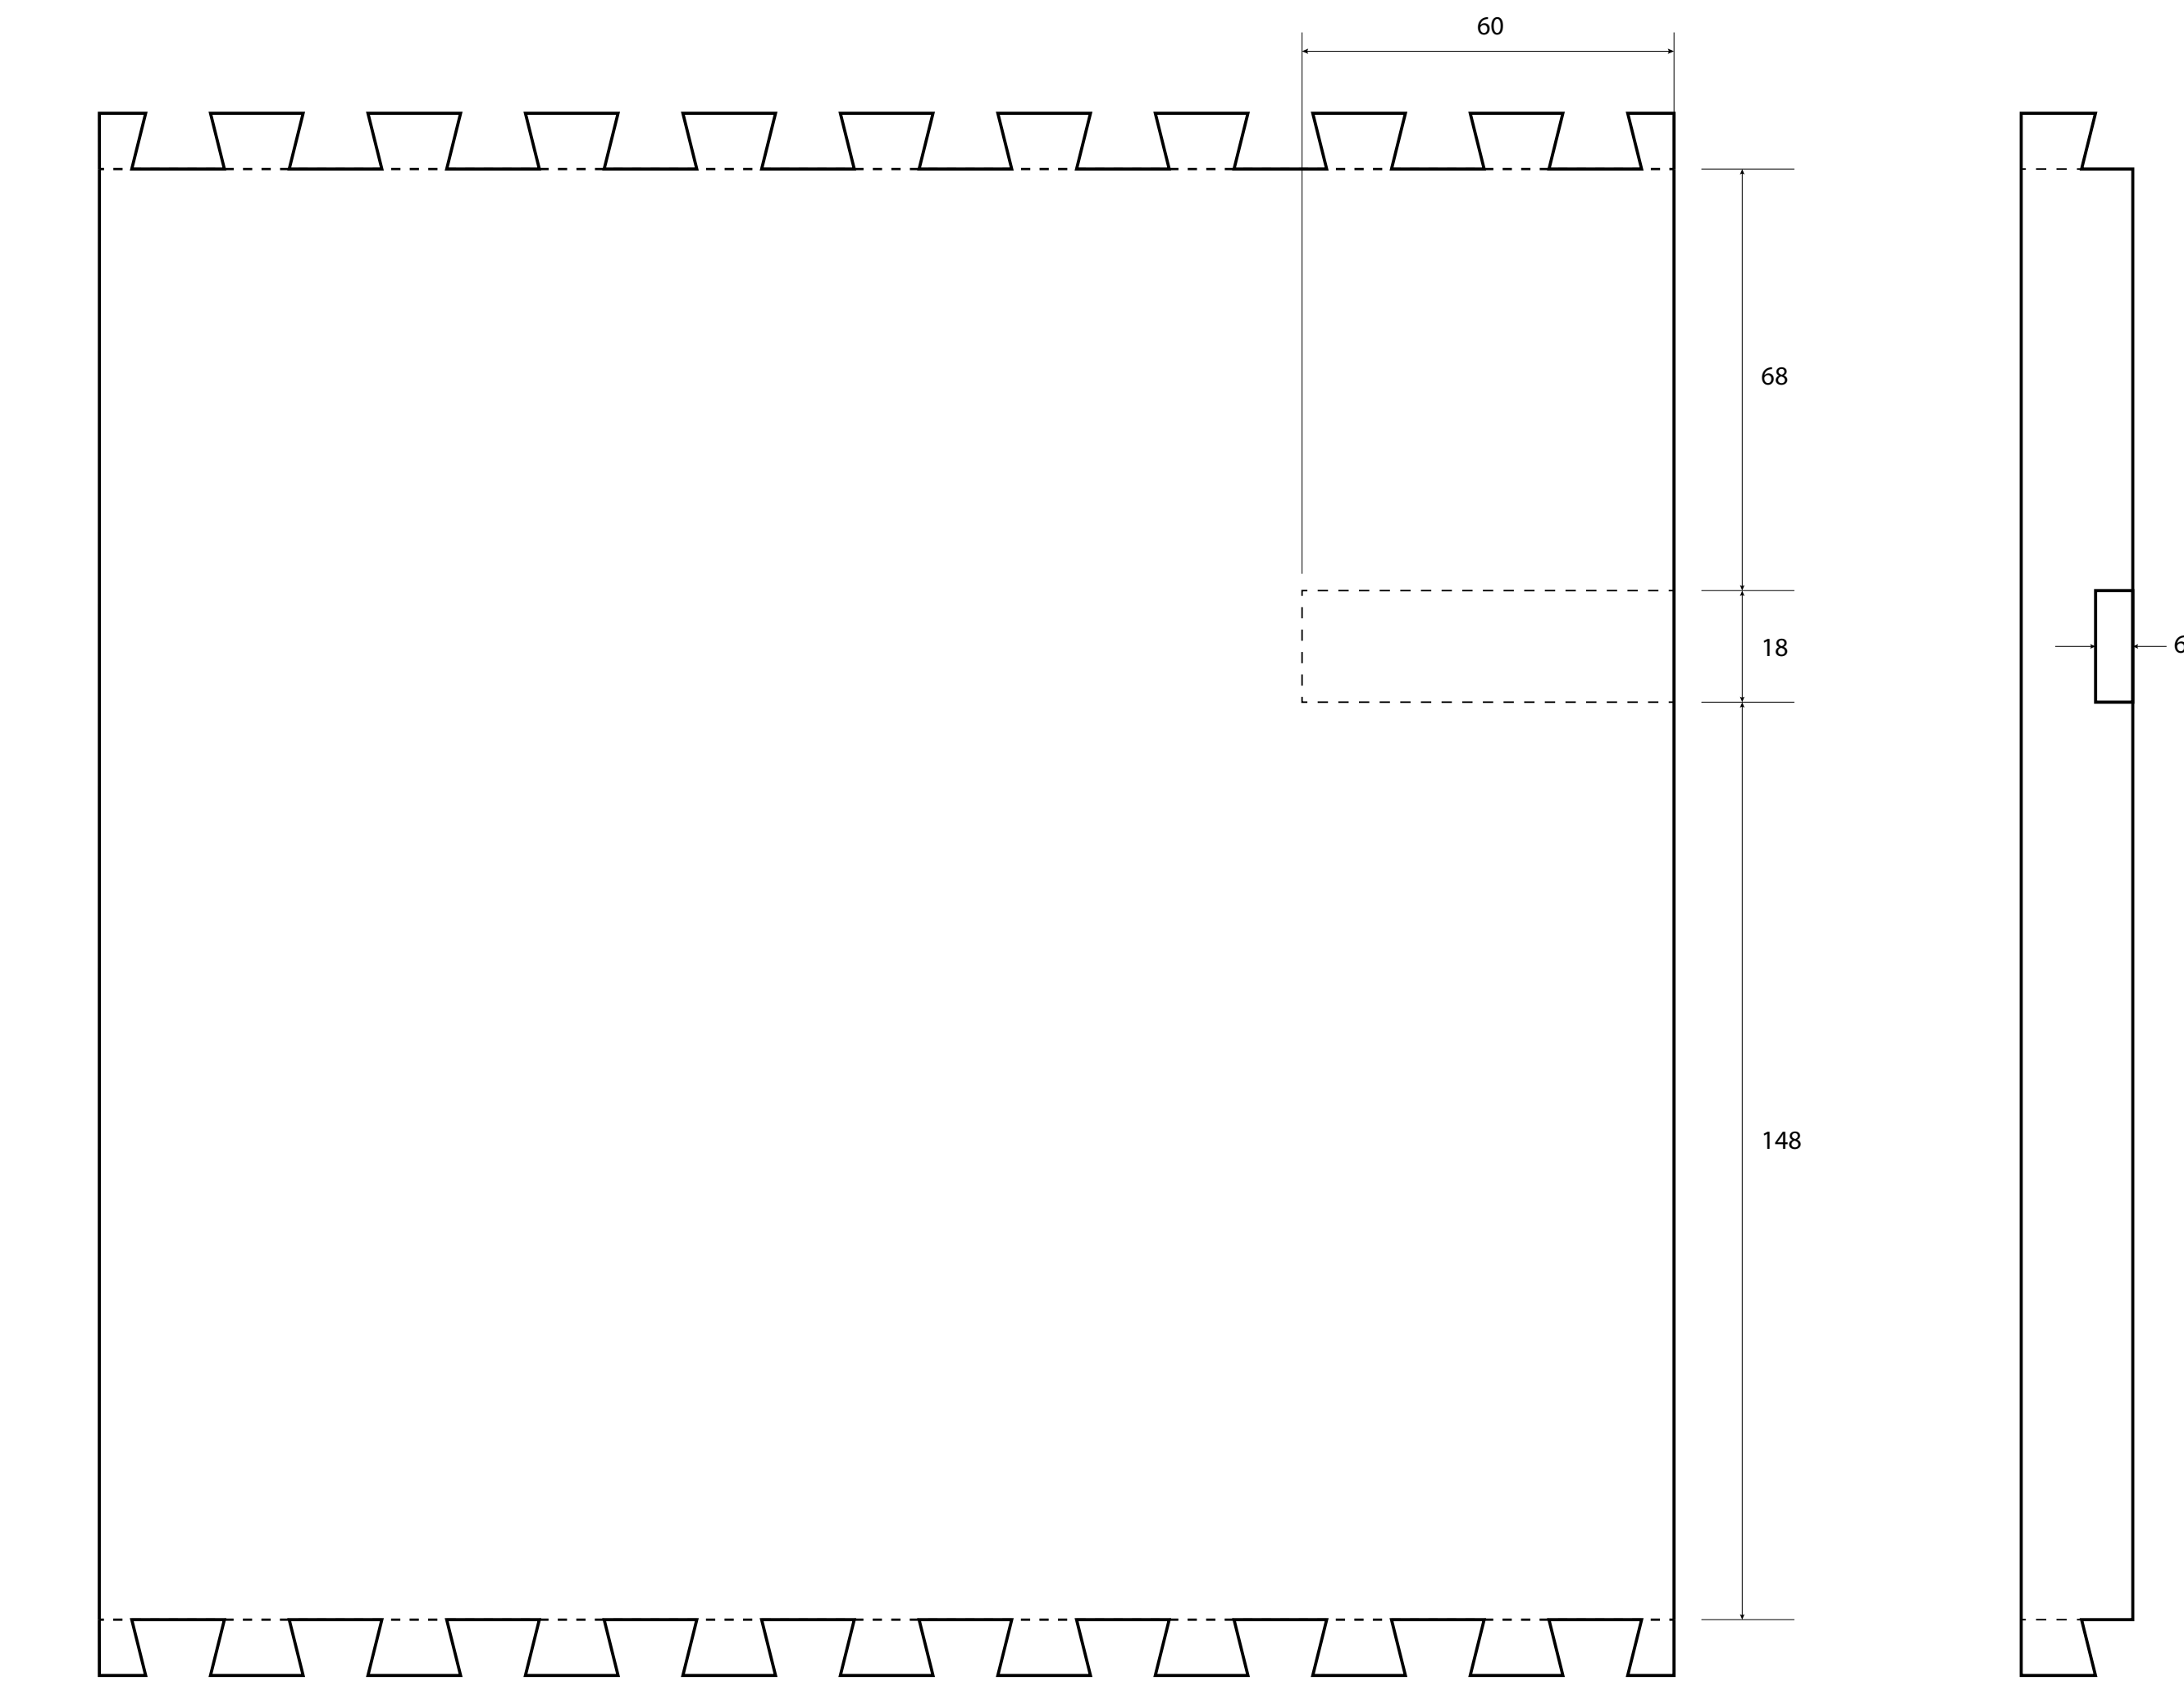


SIDE, LEFT

* Triangular fillets may be added in the rebates after the crossbar is fitted.

ODS HEAD - Metric
Modelled after the ODS, s/n: 201

18mm pine board (200cm x 40cm) used extensively,
except for front and back panels (12mm birch plywood)

Drawing by: Stephen Begley
Date: 01/04/2023




FRONT PANEL

* Front and back panel, 12mm birch plywood.




Side cleats, 18mm x 18mm, x2
(Horizontal, chassis guide rails)

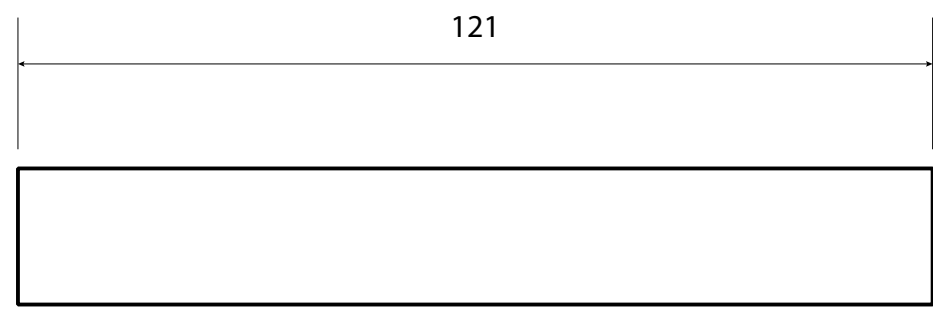


Side cleats, 18mm x 18mm, x4
(Vertical, front and back)



BACK PANEL

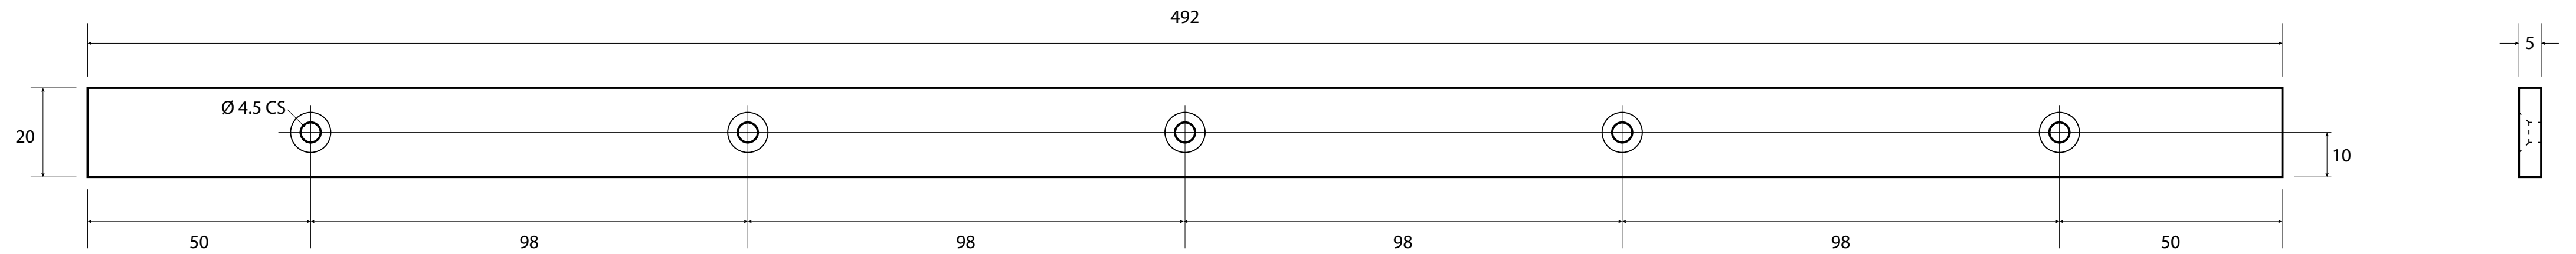

FASCIA BAR
20mm x 5mm, Aluminium strip



Bottom cleats, 18mm x 18mm, x2
(Horizontal, front and back)